




Compact Blow Gun (Push Button Type)

SMC CORPORATION
1-16-4 Shimbashi, Minato-ku
Tokyo 105-0004, JAPAN
URL: <http://www.smcworld.com>


XT34-153

Feature: Push button type compact blow gun

With polyurethane coil tube

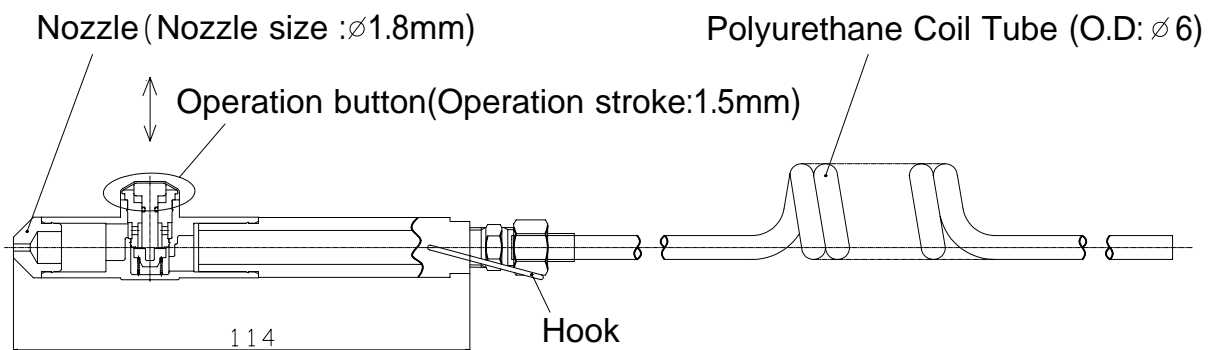


JIS symbol

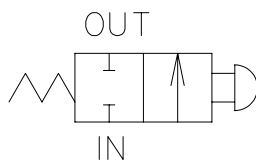

Specifications

Model	XT34-153
Fluid	Air
Operating pressure range	0.1 ~ 1.0MPa
Ambient and fluid temperature	0 to 60°C (No freezing)
Nozzle size	1.8
Operation stroke	1.5 mm
Weight (With Fitting and Polyurethane Coil Tubing)	158 g

Dimensions: mm

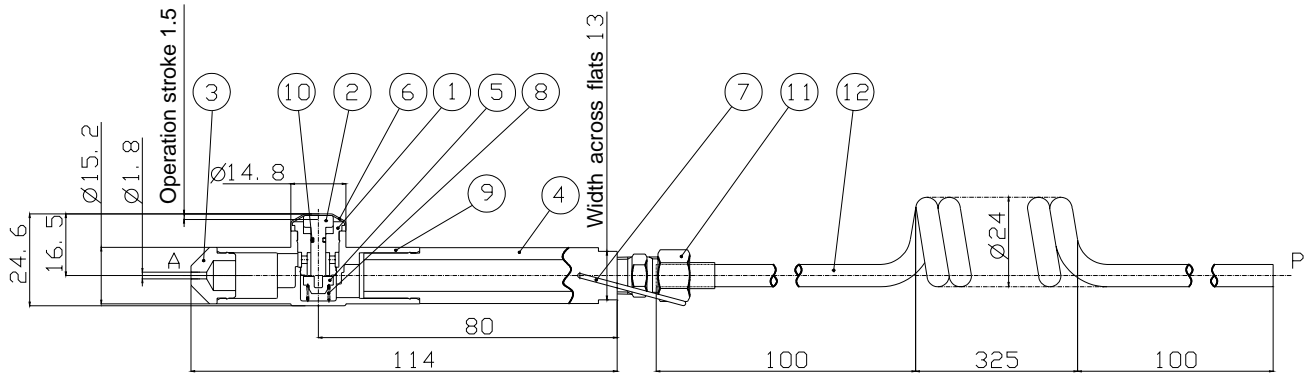

No.	Description	Material
	Body A	Brass (With electroless nickel plated)
	Push lock	POM
	Nozzle	Brass (With electroless nickel plated)
	Body B	Brass (With electroless nickel plated)
	Valve	NBR
	Cover	CR
	Hook	Sainless steel
	Spring	Sainless steel
	Body	PBT
	O-ring	NBR
	Self-Align Fittings	Brass
	Polyurethane Coil Tubing	Polyurethane

⚠ Caution: To ensure the safest possible operation of this product, please be sure to read thoroughly the "Safety Instructions" in our "Best Pneumatics" general catalog before use.