



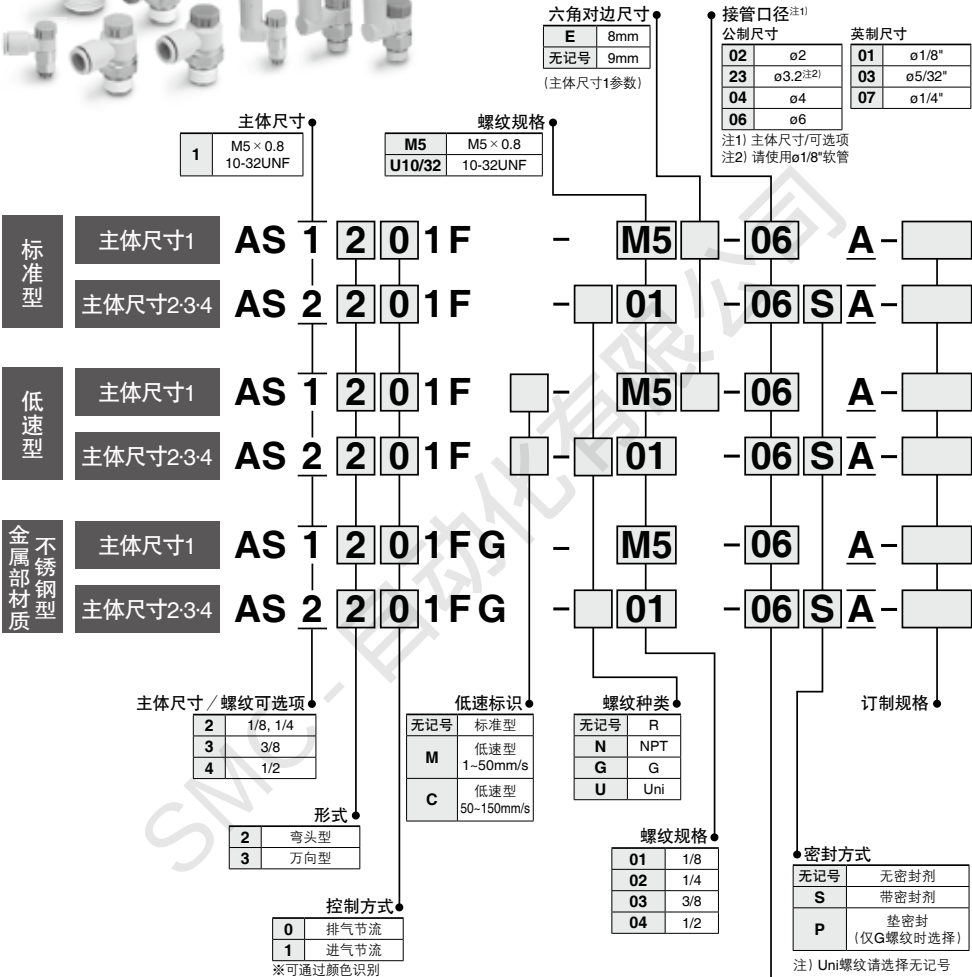

型号表示方法

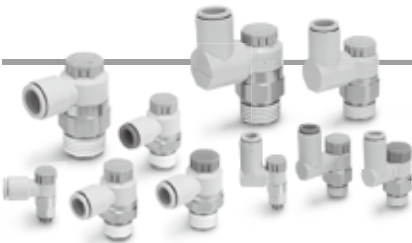

Order Made

定制规格

表示记号	规格 / 内容
-X12	润滑剂: 凡士林
-X21	无润滑脂(密封材质氟涂层)+节流阀(无单向阀)
-X214	节流阀(无单向阀)
10-	洁净
-X778	大流量型

公制尺寸	英制尺寸 ^{注4)}
23	ø3.2 ^{注3)}
04	ø4
06	ø6
08	ø8
10	ø10
12	ø12
16	ø16
01	ø1/8"
03	ø5/32"
07	ø1/4"
09	ø5/16"
11	ø3/8"
13	ø1/2"

注3) 请使用ø1/8"软管
注4) G螺纹无英制尺寸可选项

外形尺寸图 / 弯头型

密封方式 / 密封垫密封

螺纹种类 / M5, 10-32UNF

公制尺寸


(mm)

型号	d	T	D1	L1	L2	L3	重量 g
AS12□1F(M/C/G)-M5E-02A	2	M5 × 0.8	5.8	15.8	20.3	16.9	5
AS12□1F(G)-U10/32E-02A							
AS12□1F(M/C/G)-M5E-23A	3.2	10/32UNF	7.2	17.2	21.7	16.5	6
AS12□1F(G)-U10/32E-23A							
AS12□1F(M/C/G)-M5E-04A	4		8.2	18.6	23.1	16.5	6
AS12□1F(G)-U10/32E-04A							
AS12□1F(M/C/G)-M5E-06A	6		10.4	18.6	23.1	16.5	6
AS12□1F(G)-U10/32E-06A							

英制尺寸

(mm)

型号	d	T	D1	L1	L2	L3	重量 g
AS12□1F(G)-M5E-01A	1/8"	M5 × 0.8	7.2	17.2	21.7	16.9	5
AS12□1F(G)-M5E-03A							
AS12□1F(M/C/G)-U10/32E-03A	5/32"	10/32UNF	8.2	18.6	23.1	16.5	6
AS12□1F(G)-M5E-07A							
AS12□1F(M/C/G)-U10/32E-07A	1/4"		11.2	18.6	23.1	16.5	6

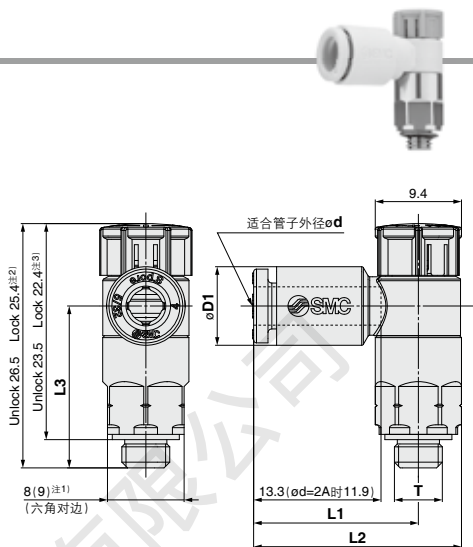

注1) () 内是六角对边9mm的尺寸。不锈钢型仅8。

注2) 参考尺寸

注3) 螺纹拧入后的参考尺寸

外形尺寸图 / 万向型

密封方式 / 密封垫密封

螺纹种类 / M5, 10-32UNF

公制尺寸


(mm)

型号	d	T	D1	L1	L2	L3	L4	重量 g
AS13□1F(M/C/G)-M5E-23A	3.2	M5 × 0.8	7.2	11.6	19.4	17.5	33.8	6
AS13□1F(G)-U10/32E-23A								
AS13□1F(M/C/G)-M5E-04A	4	10/32UNF	8.2	11.5	19.8	20.4	36.6	6
AS13□1F(G)-U10/32E-04A								
AS13□1F(M/C/G)-M5E-06A	6		10.4	20.9	20.4	36.6		
AS13□1F(G)-U10/32E-06A								

英制尺寸

(mm)

型号	d	T	D1	L1	L2	L3	L4	重量 g
AS13□1F(M/C/G)-M5E-01A	1/8"	M5 × 0.8	7.2	11.6	19.4	17.5	33.8	6
AS13□1F(G)-U10/32E-01A								
AS13□1F(M/C/G)-M5E-03A	5/32"	10/32UNF	8.2	11.5	19.8	20.4	36.6	6
AS13□1F(G)-U10/32E-03A								
AS13□1F(M/C/G)-M5E-07A	1/4"		11.2	21.3	20.2	36.5		
AS13□1F(G)-U10/32E-07A								

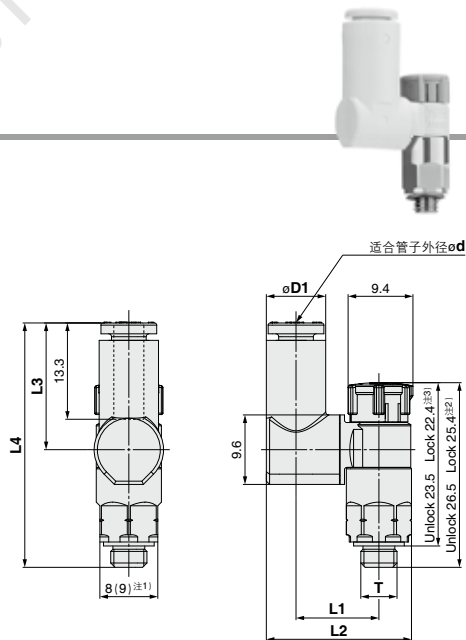


注1) () 内是六角对边9mm的尺寸。不锈钢型仅8。

注2) 参考尺寸

注3) 螺纹拧入后的参考尺寸

外形尺寸图 / 弯头型

密封方式 / 密封剂
螺纹种类 / R, NPT

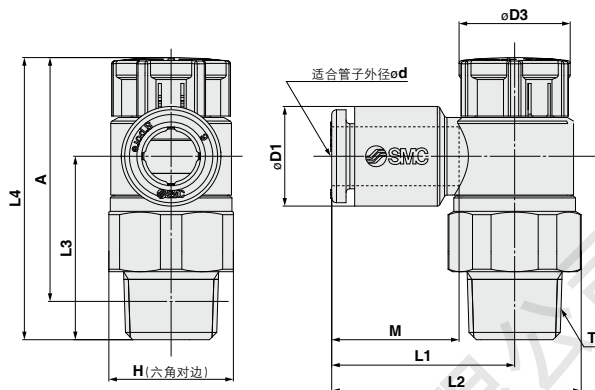

公制尺寸

型号	d	T	H	D1	D3	L1	L2	L3	L4 ^{注1)}		A ^{注2)}		M	重量 g
									Unlock	Lock	Unlock	Lock		
AS22□1F(M/C/G)-01-23(S)A	3.2	1/8	13 (12.7)	7.2	12	19.1	26.2	19.1	30.6	29.2	27.5	26.1	13.3	9(9)
AS22□1F(M/C/G)-01-04(S)A	4			8.2										
AS22□1F(M/C/G)-01-06(S)A	6			10.4										
AS22□1F(M/C/G)-01-08(S)A	8			13.2		22.4	29.5						14.2	11(10)
AS22□1F(M/C/G)-01-10(S)A	10	1/4	17 (17.5)	15.9	13	25.3	32.4	22.6	36.6	35	31.1	29.5	15.6	12(11)
AS22□1F(M/C/G)-02-23(S)A	3.2			7.2		20.9	30.2(30.3)						13.3	18(19)
AS22□1F(M/C/G)-02-04(S)A	4			8.2										
AS22□1F(M/C/G)-02-06(S)A	6			10.4		23.4	32.7(32.8)							
AS22□1F(M/C/G)-02-08(S)A	8	1/4	19	13.2	16.6	23.9	33.2(33.3)	22.6	36.6	35	31.1	29.5	14.2	19(20)
AS22□1F(M/C/G)-02-10(S)A	10			15.9		26.9	36.2(36.3)						15.6	20(21)
AS32□1F(G)-02-06(S)A	6			10.4		21.8	32.1						13.3	40(40)
AS32□1F(G)-02-08(S)A	8			13.2		22.7	33						14.2	41(41)
AS32□1F(G)-02-10(S)A	10	3/8	19	15.9	16.6	26.7	37	50	48.4	44.5	42.9	35.5	15.6	42(42)
AS32□1F(G)-02-12(S)A	12			18.5		29.7	40						17	43(43)
AS32□1F(G)-03-06(S)A	6			10.4		21.8	32.1						13.3	31(32)
AS32□1F(G)-03-08(S)A	8			13.2		22.7	33						14.2	
AS32□1F(G)-03-10(S)A	10	1/2	24 (23.8)	15.9	18.8	26.7	37	50.8	49.2	43.7	42.1	35.5	15.6	54(53)
AS32□1F(G)-03-12(S)A	12			18.5		29.7	40						17	56(55)
AS42□1F(G)-04-10(S)A	10			15.9		27.4	40.3(40.2)						15.6	60(59)
AS42□1F(G)-04-12(S)A	12			18.5		30.8	43.7(43.6)						17	
AS42□1F(G)-04-16(S)A	16			23.8		34.8	47.7(47.6)	32.7					20.6	


注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸 注3) ()内是NPT或低速型的尺寸

英制尺寸

型号	d	T	H	D1	D3	L1	L2	L3	L4 ^{注1)}		A ^{注2)}		M	重量 g
									Unlock	Lock	Unlock	Lock		
AS22□1F(M/C/G)-01-01(S)A	1/8"	1/8	13 (12.7)	7.2	12	19.1	26.2	19.1	30.6	29.2	27.5	26.1	13.3	9(9)
AS22□1F(M/C/G)-01-03(S)A	5/32"			8.2										
AS22□1F(M/C/G)-01-07(S)A	1/4"			11.2		20.8	27.9							
AS22□1F(M/C/G)-01-09(S)A	5/16"			13.2		22.4	29.5						14.2	11(10)
AS22□1F(M/C/G)-02-01(S)A	1/8"	1/4	17 (17.5)	7.2	13	20.9	30.2(30.3)	22.6	36.6	35	31.1	29.5	13.3	18(19)
AS22□1F(M/C/G)-02-03(S)A	5/32"			8.2										
AS22□1F(M/C/G)-02-07(S)A	1/4"			11.2		23.4	32.7(32.8)							
AS22□1F(M/C/G)-02-09(S)A	5/16"			13.2		23.9	33.2(33.3)						14.2	19(20)
AS22□1F(M/C/G)-02-11(S)A	3/8"	3/8	19	15.5	16.6	26.4	35.7(35.8)	22.6	36.6	35	31.1	29.5	15.6	20(21)
AS32□1F(G)-02-07(S)A	1/4"			11.2		21.8	32.1						13.3	40(40)
AS32□1F(G)-02-09(S)A	5/16"			13.2		22.7	33						14.2	41(41)
AS32□1F(G)-02-11(S)A	3/8"			15.5		26.7	37						15.6	
AS32□1F(G)-03-07(S)A	1/4"	1/2	24 (23.8)	11.2	18.8	21.8	32.1	50.8	49.2	43.7	42.1	35.5	13.3	31(32)
AS32□1F(G)-03-09(S)A	5/16"			13.2		22.7	33						14.2	
AS32□1F(G)-03-11(S)A	3/8"			15.5		26.7	37						15.6	32(33)
AS42□1F(G)-04-11(S)A	3/8"			15.5		27.4	40.3(40.2)						15.6	54(53)
AS42□1F(G)-04-13(S)A	1/2"			19.3		30.9	43.8(43.7)	34.7					17	56(55)

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸 注3) ()内是NPT或低速型的尺寸

外形尺寸图 / 万向型

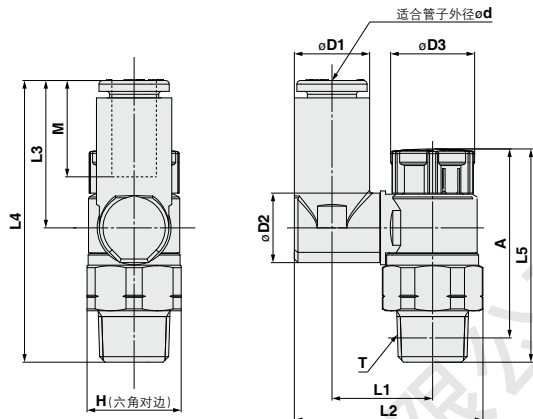密封方式 / 密封剂
螺纹种类 / R, NPT

公制尺寸

型号	d	T	H	D1	D2	D3	L1	L2	L3	L4	L5 ^{注1)}		A ^{注2)}		M	重量 g
											Unlock	Lock	Unlock	Lock		
AS23□1F(M/C/G)-01-23(S)A	3.2	1/8	13 (12.7)	7.2	9.6	12	13.3	24	17.5	36	30.6	29.2	27.5	26.1	13.3	10(10)
AS23□1F(M/C/G)-01-04(S)A	4			8.2			13.9	25.1								11(10)
AS23□1F(M/C/G)-01-06(S)A	6			10.4			16.4	30.1								14.2
AS23□1F(M/C/G)-01-08(S)A	8			13.2			16.5	29.9(30)								19(20)
AS23□1F(M/C/G)-02-04(S)A	4	1/4	17 (17.5)	8.2	12.9	13	19	33.8(33.9)	21.4	43.9	36.6	35	31.1	29.5	13.3	21(22)
AS23□1F(M/C/G)-02-06(S)A	6			11.2			20.9	34.9(35)								14.2
AS23□1F(M/C/G)-02-08(S)A	8			13.2			20.2	38.1(38.2)								22(22)
AS23□1F(M/C/G)-02-10(S)A	10			15.9			23	42.5								15.6
AS33□1F(G)-02-06(S)A	6	1/4	19	11.2	12.9	16.6	20.2	36	21.4	57.8	50	48.4	44.5	42.9	13.3	23(24)
AS33□1F(G)-02-08(S)A	8			13.2			23	37.1								42(42)
AS33□1F(G)-02-10(S)A	10			15.9			23	41.2								43(43)
AS33□1F(G)-02-12(S)A	12			18.5			23	42.5								46(46)
AS33□1F(G)-03-06(S)A	6	3/8	19	11.2	12.9	16.6	20.2	36	21.4	50.1	42.3	40.7	37.1	35.5	13.3	34(35)
AS33□1F(G)-03-08(S)A	8			13.2			23	37.1								35(36)
AS33□1F(G)-03-10(S)A	10			15.9			23	41.2								38(39)
AS33□1F(G)-03-12(S)A	12			18.5			23	42.5								40(41)
AS43□1F(G)-04-10(S)A	10	1/2	24 (23.8)	15.9	17.4	18.8	25.6	46.4(46.3)	26.1	61.2	50.8	49.2	43.7	42.1	15.6	61(59)
AS43□1F(G)-04-12(S)A	12			18.5			26.2	48.3(48.2)								64(63)

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸 注3) () 内是NPT或低速型的尺寸

英制尺寸


型号	d	T	H	D1	D2	D3	L1	L2	L3	L4	L5 ^{注1)}		A ^{注2)}		M	重量 g
											Unlock	Lock	Unlock	Lock		
AS23□1F(M/C/G)-01-01(S)A	1/8"	1/8	13 (12.7)	7.2	9.6	12	13.3	24	17.5	36	30.6	29.2	27.5	26.1	13.3	10(10)
AS23□1F(M/C/G)-01-03(S)A	5/32"			8.2			13.9	25.1								11(10)
AS23□1F(M/C/G)-01-07(S)A	1/4"			11.2			16.4	29.1								12(12)
AS23□1F(M/C/G)-01-09(S)A	5/16"			13.2			16.5	30.1								19(20)
AS23□1F(M/C/G)-02-03(S)A	5/32"	1/4	17 (17.5)	8.2	12.9	13	19	33.8(33.9)	21.4	43.9	36.6	35	31.1	29.5	13.3	21(22)
AS23□1F(M/C/G)-02-07(S)A	1/4"			11.2			20.9	34.9(35)								14.2
AS23□1F(M/C/G)-02-09(S)A	5/16"			13.2			20.2	38.1(38.2)								22(22)
AS23□1F(M/C/G)-02-11(S)A	3/8"			15.9			23	42.5								15.6
AS33□1F(G)-02-07(S)A	1/4"	3/8	19	11.2	12.9	16.6	20.2	36	21.4	57.8	50	48.4	44.5	42.9	13.3	23(24)
AS33□1F(G)-02-09(S)A	5/16"			13.2			23	37.1								42(42)
AS33□1F(G)-02-11(S)A	3/8"			15.9			23	41.2								43(43)
AS33□1F(G)-03-07(S)A	1/4"			11.2			23	42.5								46(46)
AS33□1F(G)-03-09(S)A	5/16"	3/8	19	13.2	12.9	16.6	20.2	36	21.4	50.1	42.3	40.7	37.1	35.5	13.3	34(35)
AS33□1F(G)-03-11(S)A	3/8"			15.9			23	37.1								35(36)
AS43□1F(G)-04-11(S)A	3/8"			15.9			23	41.2								38(39)
AS43□1F(G)-04-13(S)A	1/2"			18.5			25.6	46.4(46.3)								40(41)

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸 注3) () 内是NPT或低速型的尺寸

外形尺寸图 / 弯头型

密封方式 / 密封圈密封

螺纹种类 / G

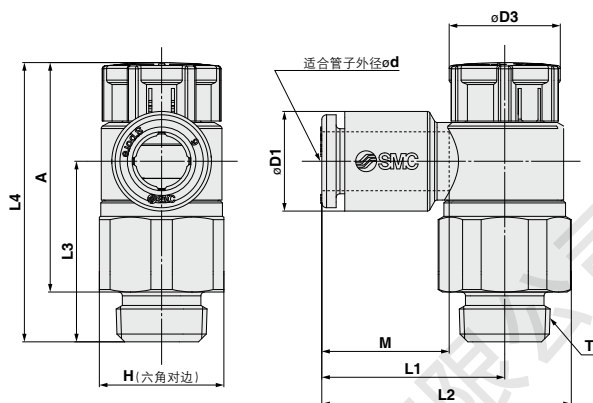


公制尺寸

(mm)

型号	d	T	H	D1	D3	L1	L2	L3	L4 ^{注1)}		A ^{注2)}		M	重量 g
									Unlock	Lock	Unlock	Lock		
AS22□1F(M/C/G)-G01-23A	3.2	1/8	13	7.2	12	19.1	26.2	18.8	30.3	28.9	24.8	23.4	13.3	10
AS22□1F(M/C/G)-G01-04A	4			8.2										
AS22□1F(M/C/G)-G01-06A	6			10.4										
AS22□1F(M/C/G)-G01-08A	8			13.2										
AS22□1F(M/C/G)-G01-10A	10	1/4	17	15.9	13	20.9	30.2	22.6	36.6	35	30.1	28.5	13.3	21
AS22□1F(M/C/G)-G02-23A	3.2			7.2										
AS22□1F(M/C/G)-G02-04A	4			8.2										
AS22□1F(M/C/G)-G02-06A	6			10.4										
AS22□1F(M/C/G)-G02-08A	8	3/8	21	13.2	16.6	21.8	33	36.4	50	48.4	43.5	41.9	14.2	22
AS22□1F(M/C/G)-G02-10A	10			15.9										
AS32□1F(G)-G02-06A	6			10.4										
AS32□1F(G)-G02-08A	8			13.2										
AS32□1F(G)-G02-10A	10	1/2	27	15.9	18.8	21.8	33	36.4	50.8	49.2	41.8	40.2	15.6	72
AS32□1F(G)-G03-06A	6			10.4										
AS32□1F(G)-G03-08A	8			13.2										
AS32□1F(G)-G03-10A	10			15.9										
AS42□1F(G)-G04-10A	10	3/4	33	18.5	21.8	21.8	33	36.4	50.8	49.2	41.8	40.2	15.6	72
AS42□1F(G)-G04-12A	12			21.8										
AS42□1F(G)-G04-14A	14			24.4										
AS42□1F(G)-G04-16A	16			27.0										

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸

外形尺寸图 / 万向型

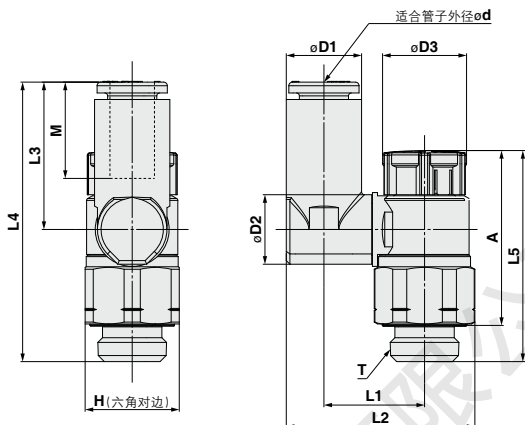密封方式 / 密封圈密封
螺纹种类 / G

公制尺寸

公制尺寸															(mm)	
型号	d	T	H	D1	D2	D3	L1	L2	L3	L4	L5 ^{注1)}		A ^{注2)}		M	重量 g
											Unlock	Lock	Unlock	Lock		
AS23□1F(M/C/G)-G01-23A	3.2	1/8	13	7.2	9.6	12	13.3	24.0	17.5	35.7	30.3	28.9	24.8	23.4	13.3	10
AS23□1F(M/C/G)-G01-04A	4			8.2			13.9	25.1	20.4	38.5					11	
AS23□1F(M/C/G)-G01-06A	6			10.4			26.2	11								
AS23□1F(M/C/G)-G01-08A	8	1/4	17	13.2	10.2	13	16.4	30.1	21.5	39.7	36.6	35	30.1	28.5	14.2	12
AS23□1F(M/C/G)-G02-04A	4			8.2	16.5		29.9	17.5	40.1	22						
AS23□1F(M/C/G)-G02-06A	6			10.4	19		33.8	21.4	43.9	24						
AS23□1F(M/C/G)-G02-08A	8			13.2	12.9		34.9	23.5	46.0	14.2					25	
AS23□1F(M/C/G)-G02-10A	10			15.9	20.9		38.1	24.7	47.3	15.6					26	
AS33□1F(G)-G02-06A	6	1/4	21	10.4	12.9	16.6	20.2	36.6	21.4	57.8	50	48.4	43.5	41.9	13.3	51
AS33□1F(G)-G02-08A	8			13.2			20.2	38.0	23.5	59.9					14.2	52
AS33□1F(G)-G02-10A	10			15.9			23	42.2	26.1	58.0					15.6	55
AS33□1F(G)-G02-12A	12			18.5			23	43.5	28.3	59.9					17	57
AS33□1F(G)-G03-06A	6			3/8	21	10.4	12.9	16.6	20.2	36.6	21.4	50.1	42.3	40.7	34.8	33.2
AS33□1F(G)-G03-08A	8	13.2	20.2			38.0			23.5	52.2	14.2	42				
AS33□1F(G)-G03-10A	10	15.9	23			42.2			26.1	50.3	15.6	46				
AS33□1F(G)-G03-12A	12	18.5	23			43.5			28.3	52.2	17	47				
AS43□1F(G)-G04-10A	10	1/2	27	15.9	17.4	18.8	25.6	47.9	26.1	61.2	50.8	49.2	41.8	40.2	15.6	78
AS43□1F(G)-G04-12A	12			18.5	21		26.2	49.8	28.3	63.4					17	82

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸

弯头
方向

AS-A

AS-FM
-FC-AAS-FG
-A

AS-FS

AS-FSM
-FSC/

AS-FSG

AS

AS-FM

AS□
1FGAS-
X737

AS难燃

AS-W2

ASB

ASG

AS-FPQ
-FPG

直通

AS-A

AS-FM
-FC

AS-FG

TMH

AS-FS

AS-FSM
-FSC

AS-FSG

AS

AS□
1FG

AS-3

AS-
DPPAS-
X900


紧凑

JAS

JASV

外形尺寸图 / 弯头型

螺纹种类 / Uni

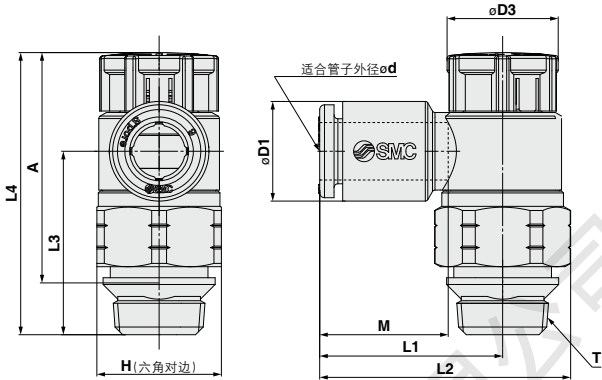

公制尺寸

型号	d	T Uni 螺纹	H	D1	D3	L1	L2	L3	L4 ^{注1)}		A ^{注2)}		M	重量 g
									Unlock	Lock	Unlock	Lock		
AS22□1F-U01-23A	3.2	1/8	13	7.2	12	19.1	26.2	19.1	30.6	29.2	25.8	24.4	13.3	9
AS22□1F-U01-04A	4			8.2									14.2	11
AS22□1F-U01-06A	6			10.4									15.6	12
AS22□1F-U01-08A	8			13.2										
AS22□1F-U01-10A	10	1/4	17	15.9	13	22.4	29.5	22.6	36.6	35	30.2	28.6	14.2	18
AS22□1F-U02-23A	3.2			7.2									15.6	19
AS22□1F-U02-04A	4			8.2									13.3	17
AS22□1F-U02-06A	6			10.4									14.2	18
AS22□1F-U02-08A	8	1/4	19	13.2	16.6	20.9	30.2	22.6	36.6	35	30.2	28.6	15.6	19
AS22□1F-U02-10A	10			15.9									13.3	39
AS32□1F-U02-06A	6			10.4									14.2	40
AS32□1F-U02-08A	8			13.2									17	42
AS32□1F-U02-10A	10	3/8	19	15.9	16.6	26.7	37	35.7	50	48.4	43.6	42	15.6	40
AS32□1F-U02-12A	12			18.5									17	42
AS32□1F-U03-06A	6			10.4									13.3	39
AS32□1F-U03-08A	8			13.2									14.2	40
AS32□1F-U03-10A	10	1/2	24	15.9	18.8	26.7	37	35.7	50.8	49.2	42.2	40.6	15.6	52
AS32□1F-U03-12A	12			18.5									17	54
AS42□1F-U04-10A	10			15.9									20.6	58
AS42□1F-U04-12A	12			18.5										
AS42□1F-U04-16A	16			23.8		34.8	47.7	32.7						

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸 注3) 仅标准型可选Uni螺纹。低速型 / 不锈钢型不可用


英制尺寸

型号	d	T Uni 螺纹	H	D1	D3	L1	L2	L3	L4 ^{注1)}		A ^{注2)}		M	重量 g
									Unlock	Lock	Unlock	Lock		
AS22□1F-U01-01A	1/8"	1/8	13	7.2	12	19.1	26.2	19.1	30.6	29.2	25.8	24.4	13.3	9
AS22□1F-U01-03A	5/32"			8.2									14.2	11
AS22□1F-U01-07A	1/4"			11.2									15.6	12
AS22□1F-U01-09A	5/16"			13.2										
AS22□1F-U02-01A	1/8"	1/4	17	7.2	13	20.9	30.2	22.6	36.6	35	30.2	28.6	13.3	17
AS22□1F-U02-03A	5/32"			8.2									14.2	18
AS22□1F-U02-07A	1/4"			11.2									15.6	19
AS22□1F-U02-09A	5/16"			13.2										
AS22□1F-U02-11A	3/8"	1/4	19	15.5	16.6	26.7	37	35.9	50	48.4	43.6	42	13.3	39
AS22□1F-U02-07A	1/4"			11.2									14.2	40
AS32□1F-U02-09A	5/16"			13.2									15.6	40
AS32□1F-U02-11A	3/8"			15.5									17	42
AS32□1F-U03-07A	1/4"	3/8	19	11.2	16.6	21.8	32.1	28.7	42.3	40.7	35.9	34.3	13.3	39
AS32□1F-U03-09A	5/16"			13.2									14.2	40
AS32□1F-U03-11A	3/8"			15.5									15.6	40
AS32□1F-U03-13A	7/16"			17.5									17	42
AS42□1F-U04-11A	3/8"	1/2	24	15.5	18.8	27.4	40.3	36.2	50.8	49.2	42.2	40.6	15.6	52
AS42□1F-U04-13A	1/2"			19.3									17	54

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸 注3) 仅标准型可选Uni螺纹。低速型 / 不锈钢型不可用

外形尺寸图 / **万向型**

螺纹种类 / Uni

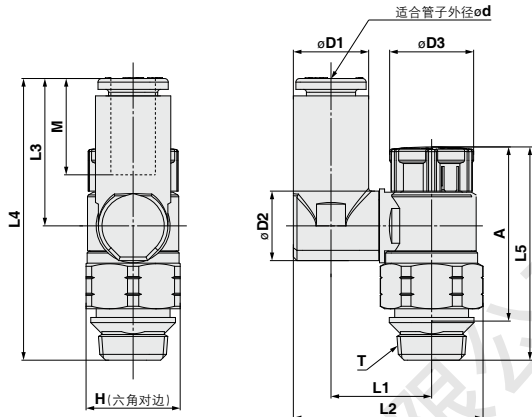

公制尺寸

型号	d	T Uni螺纹	H	D1	D2	D3	L1	L2	L3	L4	L5 ^{注1)}		A ^{注2)}		M	重量 g
AS23□1F-U01-23A	3.2	1/8	13	7.2	9.6	12	13.3	24	17.5	36	30.6	29.2	25.8	24.4	13.3	9
AS23□1F-U01-04A	4			8.2			13.9	25.1	20.4	38.8						10
AS23□1F-U01-06A	6			10.4			16.4	26.2	21.5	40						11
AS23□1F-U01-08A	8	1/4	17	13.2	12.9	13	16.5	29.9	17.5	40.1	36.6	35	30.2	28.6	13.3	18
AS23□1F-U02-04A	4			8.2			19	34.9	23.5	46						19
AS23□1F-U02-06A	6			11.2			20.9	38.1	24.7	47.3						20
AS23□1F-U02-08A	8	1/4	19	13.2	12.9	16.6	20.2	36	21.4	57.8	50	48.4	43.6	42	13.3	31
AS33□1F-U02-06A	6			11.2			23	37.1	23.5	59.9						32
AS33□1F-U02-10A	10			15.9			41.2	26.1	62.5	64.7						34
AS33□1F-U02-12A	12	3/8	19	18.5	17.4	16.6	20.2	36	21.4	50.1	42.3	40.7	35.9	34.3	13.3	31
AS33□1F-U03-06A	6			11.2			23	37.1	23.5	52.2						32
AS33□1F-U03-08A	8			13.2			41.2	26.1	54.8	57						34
AS33□1F-U03-10A	10	1/2	24	15.9	17.4	18.8	25.6	46.4	26.1	61.2	50.8	49.2	42.2	40.6	15.6	54
AS33□1F-U03-12A	12			18.5			26.2	48.3	28.3	63.4						56
AS43□1F-U04-12A	12			18.5			26.2	48.3	28.3	63.4						56

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸 注3) 仅标准型可选Uni螺纹, 低速型 / 不锈钢型不可用

英制尺寸

型号	d	T Uni螺纹	H	D1	D2	D3	L1	L2	L3	L4	L5 ^{注1)}		A ^{注2)}		M	重量 g
AS23□1F-U01-01A	1/8"	1/8	13	7.2	9.6	12	13.3	24	17.5	36	30.6	29.2	25.8	24.4	13.3	9
AS23□1F-U01-03A	5/32"			8.2			13.9	25.1	20.2	38.7						10
AS23□1F-U01-07A	1/4"			11.2			16.4	29.1	20.2	38.7						11
AS23□1F-U01-09A	5/16"	1/4	17	13.2	12.9	13	16.5	29.9	17.5	40.1	36.6	35	30.2	28.6	13.3	17
AS23□1F-U02-03A	5/32"			8.2			19	33.8	21.4	43.9						19
AS23□1F-U02-07A	1/4"			11.2			34.9	23.5	46	46						20
AS23□1F-U02-09A	5/16"	3/8	19	15.9	17.4	16.6	20.9	38.1	24.7	47.3	50	48.4	43.6	42	13.3	31
AS33□1F-U02-07A	1/4"			11.2			20.2	36	21.4	57.8						32
AS33□1F-U02-09A	5/16"			13.2			23	37.1	23.5	59.9						34
AS33□1F-U02-11A	3/8"	3/8	19	15.9	17.4	16.6	23	41.2	26.1	62.5	42.3	40.7	35.9	34.3	13.3	31
AS33□1F-U03-07A	1/4"			11.2			20.2	36	21.4	50.1						32
AS33□1F-U03-09A	5/16"			13.2			23	37.1	23.5	52.2						34
AS33□1F-U03-11A	3/8"	1/2	24	15.9	17.4	18.8	25.6	46.4	26.1	61.2	50.8	49.2	42.2	40.6	15.6	54
AS43□1F-U04-11A	3/8"			15.9			26.2	48.3	28.3	63.4						56
AS43□1F-U04-13A	1/2"			18.5			26.2	48.3	28.3	63.4						56

注1) 参考尺寸 注2) 螺纹拧入后的参考尺寸 注3) 仅标准型可选Uni螺纹, 低速型 / 不锈钢型不可用